
# FG-FLOAT2

## Floater For FG-ODP Installation

**Product Datasheet** 



- ► Detect Oil Floating On Water
- ▶ Avoid False Alarm Due To Iridescences
- ► Suitable For Sump And Basin Applications
- Exclusive For Oil Point Sensor

## **Description**

FG-FLOAT2 is a floater designed to be used with FG-ODP, the point sensor for oil leak detection - in sump, basin application and other similar applications, to detect oil floating on water.

FG-FLOAT2 has been specifically designed to avoid contact with possible hydrocarbon iridescences, hence preventing false alarms due to pre-existing pollution.


FG-FLOAT2 can be used with FG-FLOATGUIDE as a support-guide. More details on next page.




FG-FLOAT2 With FG-ODP Inserted

#### **Dimensions**

The main dimensions of FG-FLOAT2 are indicated in the schemes below.

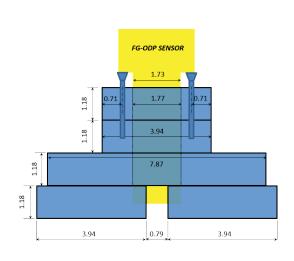

Indicated dimensions are in inch

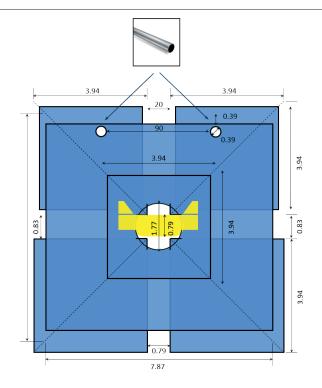

### Accessory: FG-FLOATGUIDE

- FG-FLOATGUIDE is a support-quide for oil point sensor FG-ODP on floater FG-FLOAT2.
- FG-FLOATGUIDE is made of stainless steel ANSI 316L nuts & bolts: Stainless Steel A4.
- 2 types of installation of FG-FLOATGUIDE:
  - Loose laying;
  - Ground and/or wall securing
- Detection over water level in the range (when considering standard height = 31.50 in or 850mm):
  - 0.16-31.50 in (4-800mm) --> free floating
  - 31.50-36.02 in (800-915mm) --> floater at top bearing

#### Dimensions of FG-FLOATGUIDE

The dimension of a FG-FLOATGUIDE is 8.66 (Length) x 8.66 (Depth) x 33.46 in (Height) (220 x 220 x 850 mm). Standard height: 33.46 in (850 mm). The height is extensible, e.g. to 59.05 in (1500 mm). It is adjustable on site. See below schemas.





Standard Height: 33.46 in (850mm)



Screw point for ground securing



Extensible Height: 59.05 in (1500mm)





Adjustable height thanks to vertical bar addition or cutting

#### Identification Codes

Screw points for wall securing

FG-FLOAT2	Floater
FG-ODP	Addressable Oil Point Sensor
Accessory:	
FG-FLOATGUIDE	Support-guide for oil point sensor FG-ODP on floater FG-FLOAT2

This brochure has been carefully prepared to ensure technical accuracy but is only intended for promotional use. TTK cannot guarantee that the information contained herein contains no errors or omissions, and hence does not accept responsibility related to the use of its equipment. TTK maintain its obligations set forth in the Standard Terms and Conditions of Sale and will not, under any circumstances, assume liability for any incidental damages, indirect or consequential, arising from the sale, resale, use or misuse of this product. The purchaser(s) accept their responsibility as the sole judge(s) of the adaptability of the product for the intended use.

FG-NET, FG-SYS and TOPSurveillance are trademarks of TTK S.A.S. © TTK 2024

- TTK Headquarters / 19 rue du Général Foy / 75008 Paris / France / T:+33.1.56.76.90.10 / F:+33.1.55.90.62.15 / www.ttk.fr / ventes@ttk.fr
- TTK Oil & Gas Division / 19 rue du Général Foy / 75008 Paris / France / T:+33.1.56.76.90.10 / F:+33.1.55.90.62.15 / www.ttk.fr
- TTK UK Ltd. / 3 Luke Street / London EC2A 4PX / United Kingdom / T:0207 729 6002 / F:0207 729 6003 / www.ttkuk.com / sales@ttkuk.com
- TTK Pte Ltd. / #10-08, Shenton House, 3 Shenton Way / Singapore 068805 / Tel.+65-6220.2068 / Fax. +65-6220.2026 / www.ttk.sg / sales@ttk.sg
- TTK Asia Ltd. / 2107-2108 Kai Tak Commercial Building / 317 Des Voeux Road Central / Hongkong / Tel.+852.2858.7128 / Fax.+852.2858.8428 / www.ttkasia.com / info@ttkasia.com
- TTK Middle East FZCO / Building 6EA, Office 510 PO Box 54925 / Dubai Airport Free Zone / UAE T: +971 4 70 17 553 / M: +971 50 259 66 29 / www.ttkuk.com / cgalmiche@ttk.fr
- TTK Deutschland GmbH / Berner Strasse 34 / 60437 Frankfurt / Deutschland / T:+49(0)69-95005630 / F:+49(0)69-95005640 / www.ttk-gmbh.de / vertrieb@ttk-gmbh.de
- TTK North America Inc / 1730 St. Laurent Boulevard, Suite 800 / Ottawa, ON K1G 5L1 / Canada / T: +1 613 566 5968 / www.ttkcanada.com / info@ttkcanada.com