

- ▶ Compatible with Locating Systems
- ▶ Acids, Corrosive Chemical Liquids and Water Detection
- ▶ Pre-connected in Standard Lengths
- ▶ Unique Dust-Proof Feature Efficiently Preventing False Alarms

## Description

The TTK sense cable FG-ACX detects the presence of acids, corrosive chemical liquids and water at any point along its length. The FG-ACX sense cable connects to TTK’s analog alarms (FG-ALS8, FG-ALS4 & FG-A), to respond immediately in the event of any leaks of liquids. The TTK Sense Cable FG-ACX is available in standard, pre-finished lengths of 9, 22 and 49 ft (3, 7 or 15 m) complete with connectors.

## Features & Benefits

### A RELIABLE SENSE CABLE

The FG-ACX sense cable performs the following functions:

- Rapidly detects the leak of acids, corrosive chemical liquid and water along the entire length of the cable.
- Detects and locates leaks when connected to the Locating Alarm Units: FG-ALS8 and FG-ALS4.
- Detects leaks when connected to a Non-locating Alarm Unit: FG-A.
- Detects any break or cut to the cable.
- Ingenious design: four sensing wires of helical construction, compressed and connected on an extruded central core, **efficiently prevent false alarms** triggered by **dust and all kinds of conductive residue** from the environment that has accumulated on the cable surface.

### A MODULAR SYSTEM

The FG-ACX cable ensures permanent protection in areas at risk.

FG-ACX is available in standard and pre-finished lengths of 9, 22 and 49 ft (3, 7 and 15 m). The sense cable is installed to provide the best possible protection in order to cover risks and limit the financial consequences of an undetected leak.

### EASY INSTALLATION

The male and female connectors at the end of each length of FG-ACX cable give immediate and dependable connection. Fixing clips are used to fasten the sense cables in the chosen areas.

### A TOUGH AND STURDY DESIGN

Small in diameter, the FG-ACX sense cable is light, flexible and of an easily identifiable color. The FG-ACX sense cable is a non-absorbent design that **can be reused** after cleaning, reducing the maintenance costs.

## Technical Data

<b>Compatibility</b>	Alarm units: FG-ALS8, FG-ALS4, FG-A
<b>Operating Temperature</b>	-40° to 140°F (-40° to 60°C)
<b>Minimum Bend Radius</b>	790 mils (20 mm)
<b>Weight</b>	0.27 oz/ft (25g/m)
<b>Breaking Strength for Sense Cable</b>	Minimum 165.35 lb (75 kg)
<b>Sense Cable Diameter &amp; Material</b>	295 mils (7.5 mm) in PVDF
<b>Four Sensor Wires Diameter &amp; Material</b>	47 mils (1.2 mm) in PVDF
<b>Core Material</b>	PVDF
<b>Drying Time for Cable After Water Leak</b>	10 seconds after drying the sense cable
<b>FG-ACX Color</b>	Green and light gray


# Product Diagram

## FG-ACX Sense Cable Cutting View

### Unique Feature Efficiently Preventing Dust-Proof False Alarms

- 2 black non-conductive wires with unique buried conductive constantan wires, non-apparent from the cable surface, allowing only ingress acids/chemical liquid/water.

2 Communication Wires and 2 Wires for Locating and Detection

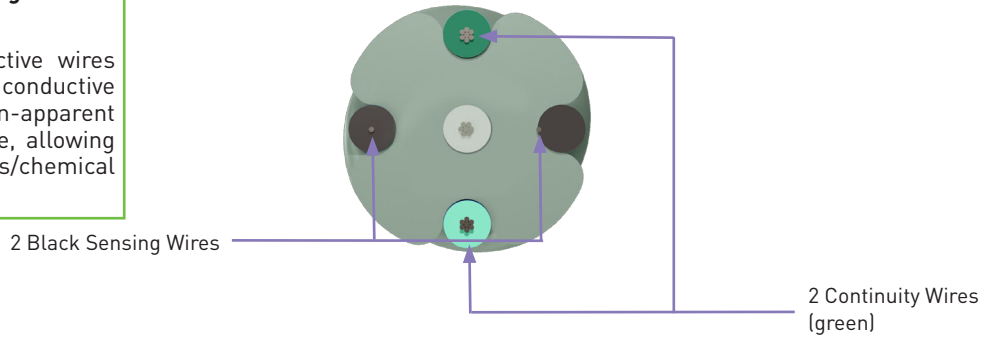

### Male Connector Tip



### Female Connector Tip



## Technical Information

In an aqueous environment, the resistance of the following products is as follows:

- A = The cable completely resists in the presence of the liquid considered.
- B = The cable resists, but undergoes a slow corrosion.
- C = The cable corrodes rapidly in the presence of the liquid considered.

In all cases where a leak is detected, it is advisable to identify the source of the leak and to repair the leak quickly. In most cases the contaminated FG-ACX cable can be washed and re-used.

This list is not exhaustive, for other chemicals, specific concentrations or temperatures please consult with your TTK representative.

Acetic acid	A	Hydrofluoric acid	A	Sea water	A
Ammonium hydroxide	B	Liquid Chlorine	A	Silver nitrate	A
Carbonic acid	A	Nitric acid	A	Sodium hydroxide	B
Caustic soda	A	Peracetic acid	B	Sodium hypochlorite	A
Formic acid	A	Phosphoric acid (95%)	A	Sodium sulfate	A
Glucose	A	Potassium hydroxide	B	Sulfuric acid	A
Hydrochloric acid	B	Salicylic acid	A		

## Identification Codes

<b>FG-ACX15</b>	Analog Acids Sense Cable in 49 ft (15m) with Connectors
<b>FG-ACX7</b>	Analog Acids Sense Cable in 22 ft (7m) with Connectors
<b>FG-ACX3</b>	Analog Acids Sense Cable in 9 ft (3m) with Connectors
<b>Accessories</b>	
<b>FG-CLC-PL</b>	Plenum Leader Cable in 11.5 ft (3.5 m)
<b>FG-TMX</b>	End Termination
<b>CF-EC100</b>	100 Hold-Down Clips with Adhesive
<b>ES-EC</b>	40 Signal Tags

## Certification



FG-ACX sense cable is compliant to NFPA 262 (known also as UL910). NFPA: National Fire Protection Association

This brochure has been carefully prepared to ensure technical accuracy but is only intended for promotional use. TTK cannot guarantee that the information contained herein contains no errors or omissions, and hence does not accept responsibility related to the use of its equipment. TTK maintain its obligations set forth in the Standard Terms and Conditions of Sale and will not, under any circumstances, assume liability for any incidental damages, indirect or consequential, arising from the sale, resale, use or misuse of this project. The purchaser(s) accept their responsibility as the sole judge(s) of the adaptability of the product for the intended use. FG-NET, FG-SYS and TOPSurveillance are trademarks of TTK S.A.S. © TTK 2024